



AL-ILL125-COB-D-6W



AL-ILL125-COB-F-6W




Specification

Product Code	AL-ILL125-COB-6W
Power[W]	6W
Color Temperature[K]	3000K/4000K/6000K
Lumen[Lm]	420-450lm
Input Voltage[V]	AC110V/AC220V
Output Voltage[V]	DC24V
Power Factor	>0.9
Beam angle	40°/45°
CRI	≥80
Type Of LED	CREE
Lifespan (Hrs)	≥50000Hrs
Efficiency[lm/W]	70-75lm/W
Dimensions[mm]	Dia127*H161mm
IP	IP67
Operating Temperature	-20°C to 45°C
Warranty	5years


LED ILLUSTRO UPLIGHT

1. Illustro 6W uplight comes with SS316L Bezel.
2. Unique Induction to LED transfer greatly improving waterproof rating.
3. 2000KG Drive over.
4. Head can be replaced whilst connected.
5. Lens version (D) and Reflector version (F) available.
6. Comes with Inground Pot.

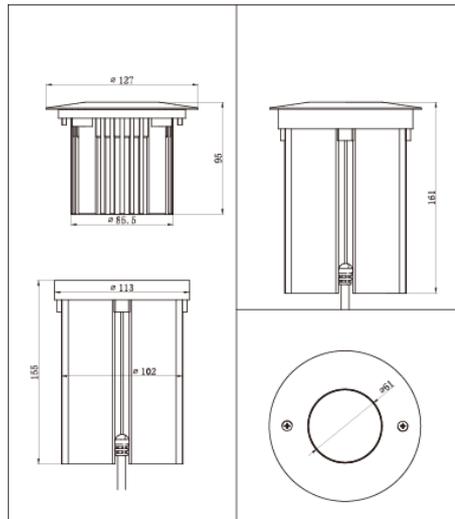

SPECTROPHOTOCOLORMETER ANALYSIS REPORT

Relative Spectral Energy Distribution:

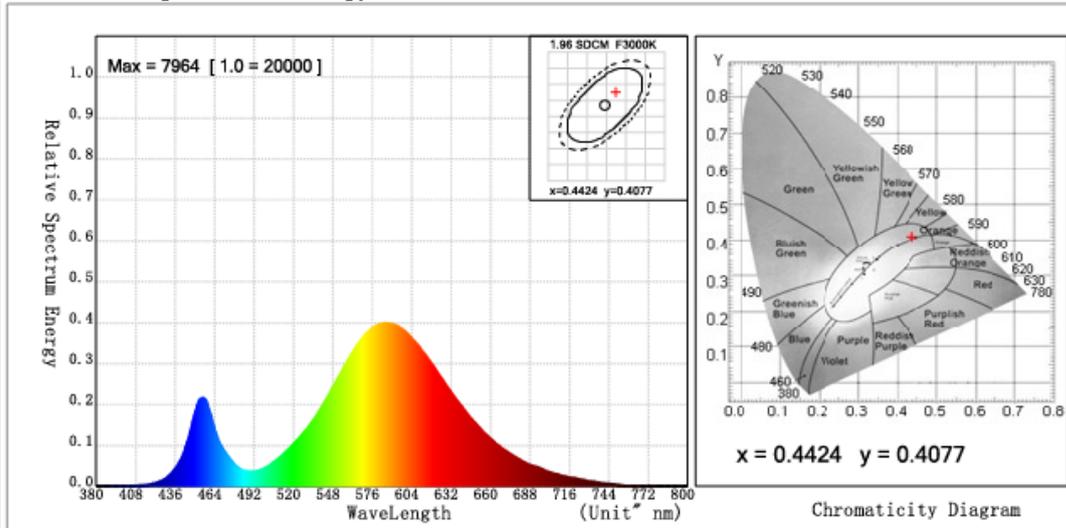

Main Parameters:

CCT	2941 K	Domaint Wave	583 nm	Luminous	528.92 lm	Efficiency	86.99
Current	0.033 A	Voltage	225.7 V	Power	6.1 W	PF	0.8
Average Color Index	60.4		Chromatic Coordinate		$x=0.4424$, $y=0.4077$ $u=0.2525$, $v=0.5236$		